


BUCHBINDERPAPPE

Extra glatt grau geklebt

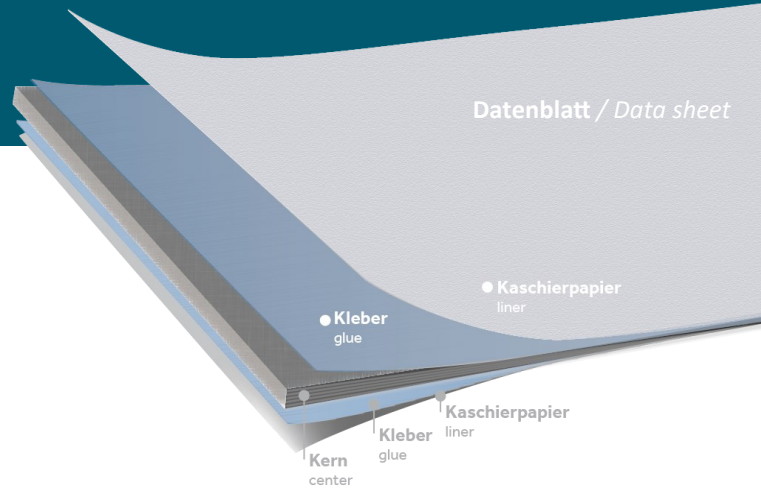

BB-BOARD 2/S GLAZED
CARTÓN GRIS SATINADO
CARTON GRIS REDOUBLÉ

TECHNISCHE WERTE | TECHNICAL FIGURES

| DICKE / Thickness (mm) | Flächengewicht Substance (g/m ²) | Biegesteifigkeit längs Bending Stiffness longitudinal (mNm) | Biegesteifigkeit quer Bending Stiffness transverse (mNm) | Berstdruck Burst pressure (kPa) |
|------------------------|---|--|---|------------------------------------|
| 1,2 | 755 | 510 | 270 | 830 |
| 1,3 | 820 | 730 | 320 | 860 |
| 1,4 | 880 | 850 | 420 | 900 |
| 1,5 | 945 | 970 | 460 | 950 |
| 1,6 | 1010 | 1200 | 560 | 970 |
| 1,7 | 1070 | 1440 | 840 | 990 |
| 1,8 | 1135 | 1880 | 870 | 1030 |
| 1,9 | 1195 | 1910 | 900 | 1070 |
| 2,0 | 1260 | 2040 | 930 | 1100 |
| 2,1 | 1325 | 2320 | 1080 | 1150 |
| 2,2 | 1385 | 2480 | 1210 | 1190 |
| 2,3 | 1450 | 2700 | 1310 | 1220 |
| 2,4 | 1510 | 2970 | 1400 | 1270 |
| 2,5 | 1575 | 3290 | 1540 | 1300 |
| 2,6 | 1640 | 3650 | 1765 | 1330 |
| 2,7 | 1700 | 4020 | 1820 | 1350 |
| 2,8 | 1765 | 4340 | 1990 | 1370 |
| 2,9 | 1830 | 4540 | 2270 | 1400 |
| 3,0 | 1890 | 4660 | 2310 | 1500 |
| 3,5 | 2205 | 7000 | 3500 | 1650 |

| | Einheit / unit of measurement | Wert / value | Toleranzen / tolerances | Testmethode / testing method |
|--------------------|--|--------------|--------------------------|------------------------------|
| Stärke / caliper | mm | | +/- 5 % | ISO 534 |
| Format / size | Formate / Zuschnitte cm / mm Large sheets / rotary cut pieces cm / mm | | +/- 1,0 mm / +/- 0,25 mm | |
| Feuchte / humidity | % | 8,0 | +/- 1,5 % | ISO 287 |

PRÜFKLIMA | TESTING CLIMATE 50% RH, 23°



Änderungen vorbehalten, Stand 11.2021/
 subject to change, date of issue 2021-11

SOLID BOARD | ANSPRECHPARTNER | CONTACT

Smurfit Kappa Wrexen Paper & Board GmbH
 Orpethaler Str.50 | DE-34474 Diemelstadt
 Tel: + 49 (0) 564 279-0 | Mail: sales.board.wrexen@smurfitkappa.de